


Multifunctional Robustline damper actuator for operating air dampers in industrial plants and in the technical building installations

- For air dampers up to approx. 1.6 m²
- Torque 8 Nm
- Nominal voltage AC/DC 24 V
- Control: modulating DC 0 ... 10 V or variable
- Position feedback DC 2 ... 10 V or variable

Optimum protection against

- Corrosion and chemical influences
- UV radiation
- Damp and condensation

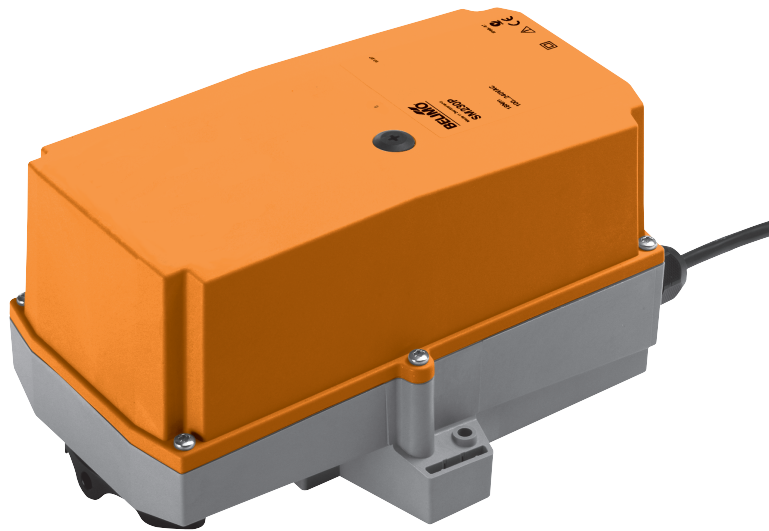

Technical data

Electrical data

Nominal voltage	AC 24 V, 50/60 Hz / DC 24 V
Nominal voltage range	AC 19.2 ... 28.8 V / DC 21.6 ... 28.8 V
Power consumption	3.5 W @ nominal torque
At rest	1.25 W
Wire sizing	5.5 VA
Connection	Halogen-free cable 1 m, 4 x 0.75 mm ²

Functional data	Factory settings	Variable	Settings
Torque (nominal torque)	Min. 8 Nm @ nominal voltage	25%, 50%, 75% reduced
Control Control signal Y	DC 0 ... 10 V, input impedance 100 kΩ	Open-close / 3-point (only AC), modulating (DC 0 ... 32 V)
Operating range	DC 2 ... 10 V	Starting point DC 0.5 ... 30 V End point DC 2.5 ... 32 V
Position feedback (measuring voltage U)	DC 2 ... 10 V, max. 0.5 mA	Starting point DC 0.5 ... 8 V End point DC 2.5 ... 10 V
Position accuracy	±5%		
Direction of rotation	Reversible with switch 0 / 1		
Direction of motion at Y = 0 V	At switch position 0 ↶ resp. 1 ↷	Electronically reversible
Manual override	Gearing latch disengaged with pushbutton, can be locked		
Angle of rotation	Max. 95°↔, can be limited at both ends with adjustable mechanical end stops		
Running time	150 s / 90°↔	43 ... 173 s
Automatic adjustment of running time, operating range and measuring signal U to match the mechanical angle of rotation	Manual triggering of the adaption by pressing the «Adaption» button or with the PC-Tool	Automatic adaption / synchronisation whenever the supply voltage is switched on
Override control	MAX (maximum position) = 100% MIN (minimum position) = 0% ZS (intermediate position, only AC) = 50%	MAX = (MIN + 30°↔) ... 100% MIN = 0° ... (MAX - 30°↔) ZS = MIN ... MAX
Sound power level	Max. 35 dB (A)	With a running time of 43 s = 45 dB (A) 173 s ≤ 35 dB (A)	
Position indication	Mechanical, pluggable		

Safety

Protection class	III Safety extra-low voltage
Degree of protection	IP66 + IP67
EMC	CE according to 2004/108/EC
Mode of operation	Type 1 (EN 60730-1)
Rated impulse voltage	0.8 kV (EN 60730-1)
Control pollution degree	4 (EN 60730-1)
Ambient temperature	-30 ... +50 °C
Non-operating temperature	-40 ... +80 °C
Ambient humidity	100% r.H.
Maintenance	Maintenance-free

Dimensions / Weight

Dimensions	See «Dimensions» on page 6
Weight	Approx. 1.3 kg

Safety notes



- The actuator is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The cover of the protective housing may be opened for adjustment and servicing. When it is closed afterwards, the housing must seal tight (see installation instructions).
- The device on the inside may only be opened up in the factory. It does not contain any parts that can be replaced or repaired by the user.
- The cable must not be removed from the device.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross section, design, installation site), and the air flow conditions must be observed.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- The information on chemical resistance refers to laboratory tests with raw materials and finished products and to trials in the field in the areas of application indicated.
- The materials used may be subjected to external influences (temperature, pressure, constructional fixture, effect of chemical substances etc.), that cannot be simulated in laboratory test or field trials.
- The information regarding areas of application and resistance can therefore only serve as a guideline. In case of doubt, we recommend that you definitely carry out a test. This information does not imply any legal entitlement. Belimo will not be held liable and will provide no warranty. The chemical or mechanical resistance of the materials used is not alone sufficient for judging the suitability of a product. Regulations pertaining to combustible liquids such as solvents etc. must be taken into account with special reference to explosion protection.

Product features

Fields of application The actuator is particularly suited for use in difficult conditions, e.g. in the field of:

- Wood drying
- Animal breeding
- Food processing
- Agricultural
- Swimming baths / Bathrooms
- Rooftop units
- General outdoor applications
- Changing atmosphere

Resistances	Test	Test standard	Testing body
	Noxious gas tests	EN 60068-2-60	Fraunhofer Institute ICT / DE
	Salt fog spray test	EN 60068-2-52	Fraunhofer Institute ICT / DE
	Ammoniac test	DIN 50916-2	Fraunhofer Institute ICT / DE
	Climatic test	IEC 60068-2-30	Trikon Solutions AG / CH
	Disinfectants (animals)		Trikon Solutions AG / CH
	UV test	EN 60068-2-5	Quinel / Zug CH
	(Solar radiation at ground level)	EN 60068-2-63	

Used materials	Actuator parts	Material
	Actuator housing	Polypropylene (PP)
	Cable glands / hollow shaft	Polyamide (PA)
	Connection cable	FRNC
	Clamp / screws in general	Steel 1.4404
	Seals	EPDM
	Form-fit insert	Anodised aluminium

Product features

(continued)

- Mode of operation** The actuator is controlled with a standard modulating signal of DC 0 ... 10 V and travels to the position defined by the control signal. The measuring voltage U serves for the electrical display of the damper position 0 ... 100% and as slave control signal for other actuators.
- Parameterisable actuators** The factory settings cover the most common applications.
- Simple direct mounting** Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.
- Manual override** Manual override with pushbutton possible (the gear is disengaged for as long as the button is pressed or remains locked).
- Adjustable angle of rotation** Adjustable angle of rotation with mechanical end stops. Standard setting 0 ... 90° ↙. The housing cover must be removed to set the angle of rotation.
- High functional reliability** The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.
- Home position** When the supply voltage is switched on for the first time, i.e. at commissioning or after pressing the «gear disengagement» switch, the actuator moves to the home position.

Pos. Direction of rotation switch	Home position
Y = 0 ↻	ccw ↻ Left stop
Y = 0 ↻	↻ cw Right stop

The actuator then moves into the position defined by the control signal.

Accessories


	Description	Data sheet
Electrical accessories	Auxiliary switch S..A..	T2 - S..A..
	Feedback potentiometer P..A..	T2 - P..A..
	Manual parameterising device MFT-H	T2 - MFT-H
	PC-Tool MFT-P	T2 - MFT-P
	Range controller SBG24	T2 - SBG24
	Positioner SG..24	T2 - SG..24
	Digital position indication ZAD24	T2 - ZAD24
Mechanical accessories	Various form-fit inserts	T2 - Z-NM..

Electrical installation

Wiring diagram

Note

- Connect via safety isolation transformer.
 - Other actuators can be connected in parallel.
- Note the performance data.

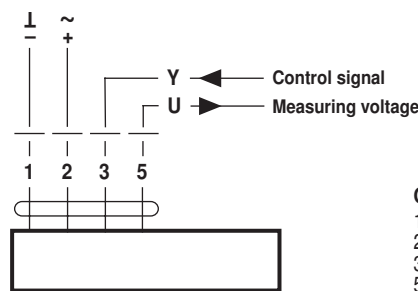

Cable colours:

- 1 = black
- 2 = red
- 3 = white
- 5 = orange

Functions with basic values

Override control with AC 24 V with relay contacts

Functions	a	b	c
0%↔	—	—	—
ZS 50%↔ (intermediate position)	—	—	—
100%↔	—	—	—
Control mode in according with Y	—	—	—

Override control with AC 24 V with rotary control switch

Pos	Functions
1	0%↔
2	ZS 50%↔ (intermediate position)
3	100%↔
4	Control mode in according with Y

Remote control 0 ... 100%

Positioner

1	~	Y	Z
1	2	3	4

SGA24
SGF24
SGE24

Minimum limit

Positioner

1	~	Y	Z
1	2	3	4

SGA24
SGF24
SGE24

Master/Slave control (position-dependent)

Control with 4 ... 20 mA via external resistance

The 500 Ω resistor converts the 4 ... 20 mA current signal to a voltage signal DC 2 ... 10 V

Position indication

Adapting the direction of rotation

1	2	-	+
1	2	3	4

ZAD24


Functional check

Procedure

- Apply AC 24 V to connection 1 and 2
- Disconnect connection 3:
 - For direction of rotation 0: Actuator turns in the direction of ↻
 - For direction of rotation 1: Actuator turns in the direction of ↻
- Short circuit connections 2 and 3:
 - Actuator runs in the opposite direction


Functions for actuators with specific parameters

Override control and limiting with AC 24 V with relay contacts

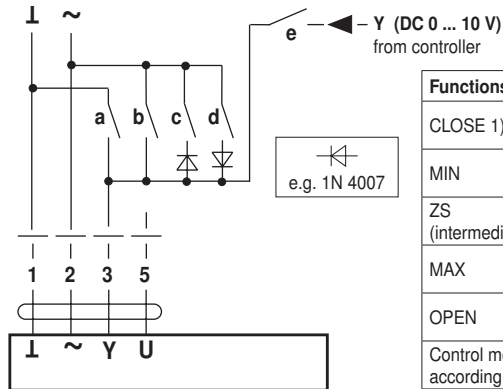


Functions	a	b	c	d	e
CLOSE 1)					
MIN					
ZS (intermediate position)					
MAX					
OPEN					
Control mode in according with Y					

Override control and limiting with AC 24 V with rotary switch

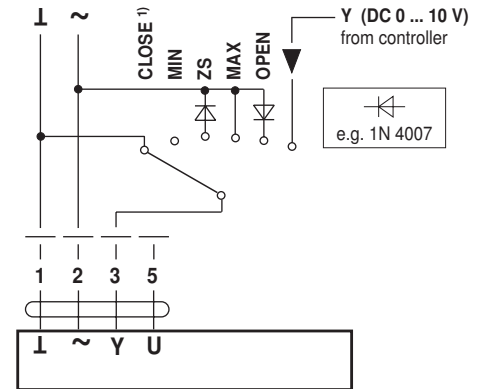


1) **Caution!** This function is only guaranteed if the start point of the operating range is defined as min. 0.6 V.


3-point control

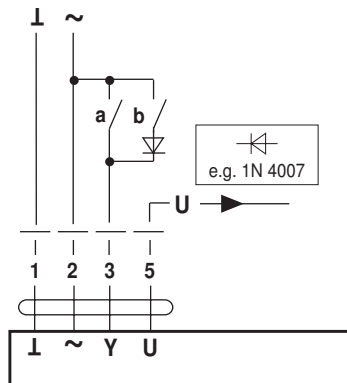

Open-close control

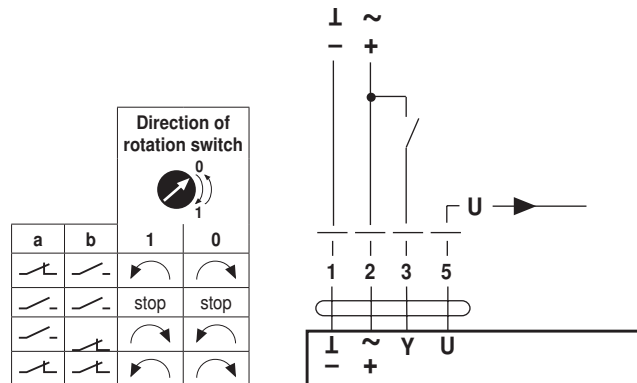

Operating controls and indicators

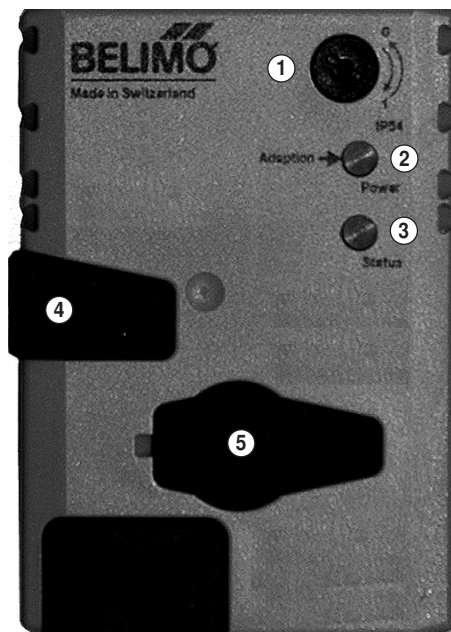


- ① **Direction of rotation switch**
Switching over:: Direction of rotation changes
- ② **Push-button and green LED display**
Off: No voltage supply or fault
On: Operation
Press button: Switches on angle of rotation adaptation followed by standard operation
- ③ **Pushbutton and yellow LED display**
Off: Standard operation
On: Adaptation or synchronising process active
Press button: No function
- ④ **Gear disengagement switch**
Press button: Gear disengaged, motor stops, manual override possible
Release button: Gear engaged, synchronisation starts, followed by standard operation
- ⑤ **Service plug**
For connecting parameterising and service tools

Check connection power supply







- ② Off } or flashing }
③ On } flashing } Check the power supply connections. L and N could be reverse.




Dimensions [mm]

Dimensional drawings



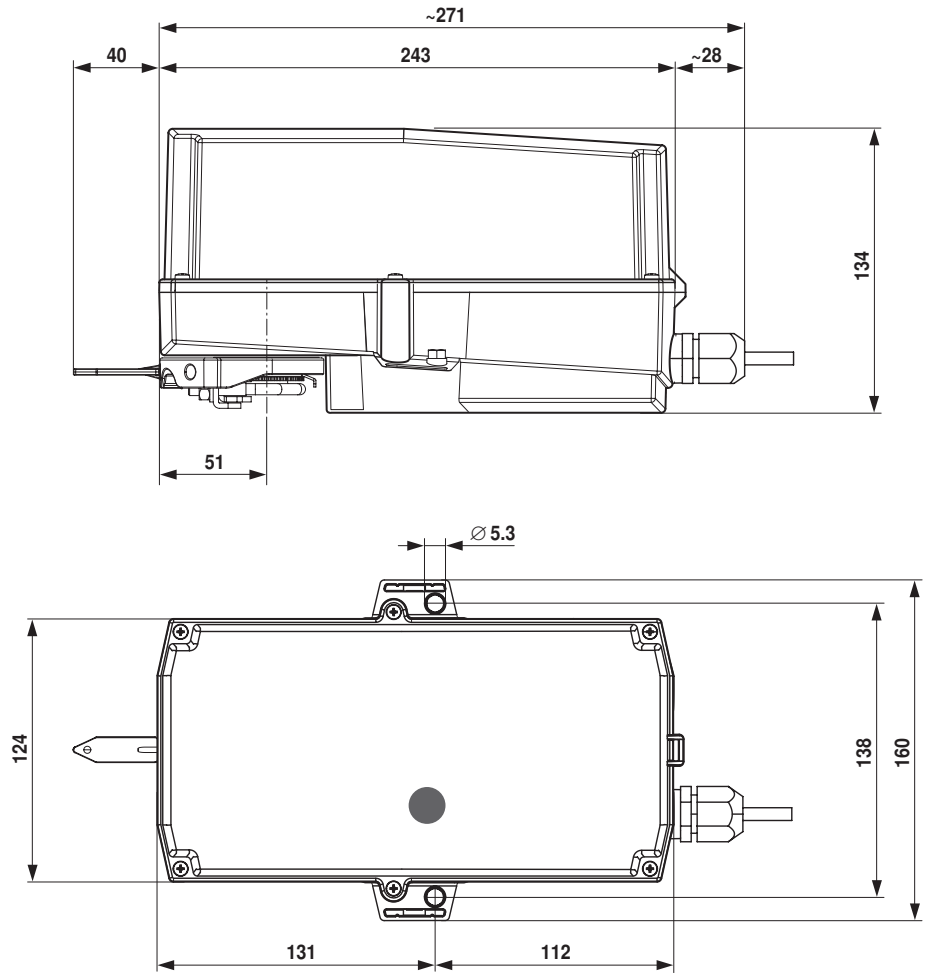


Damper spindle	Length	● I	■ I	◆ I
	20...58	8...20	8...14	10...20

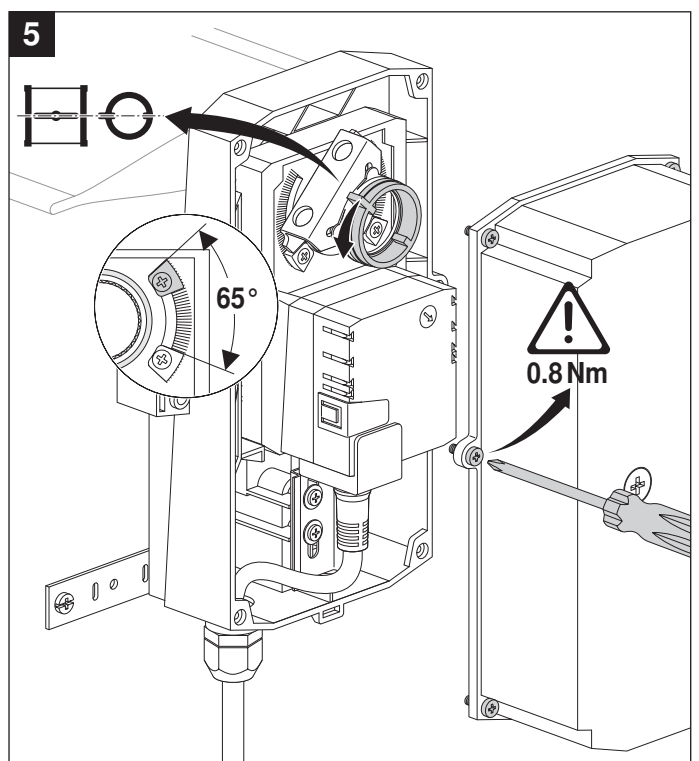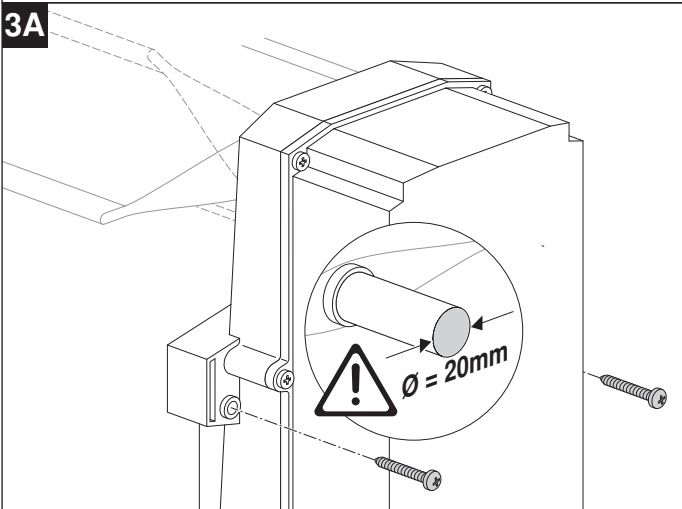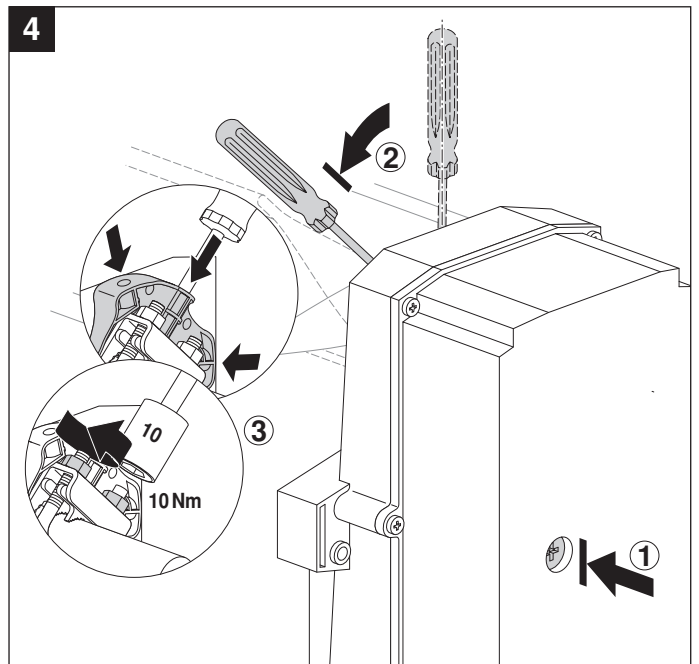
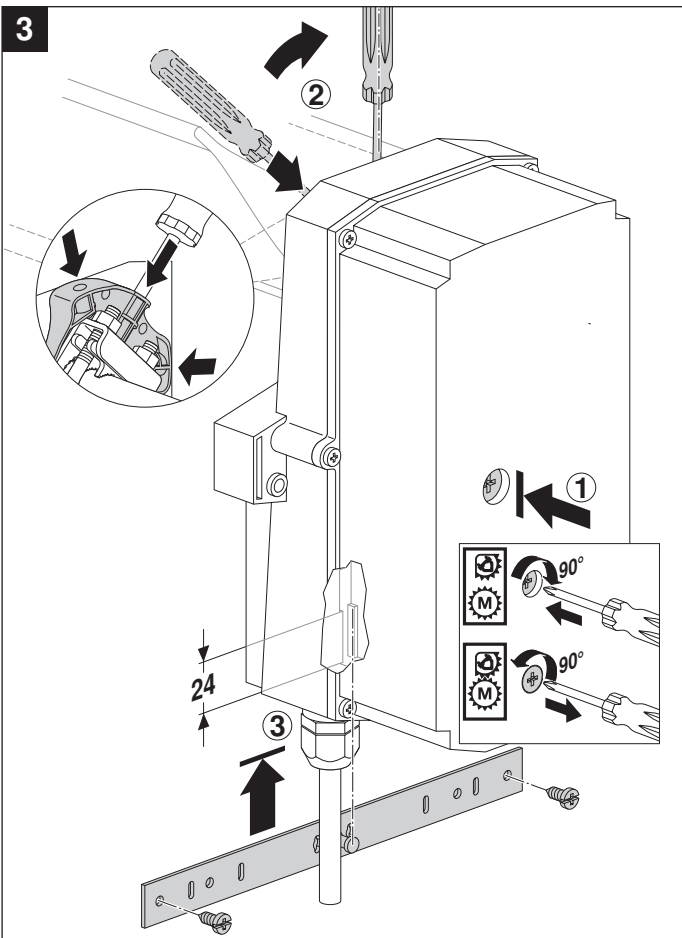
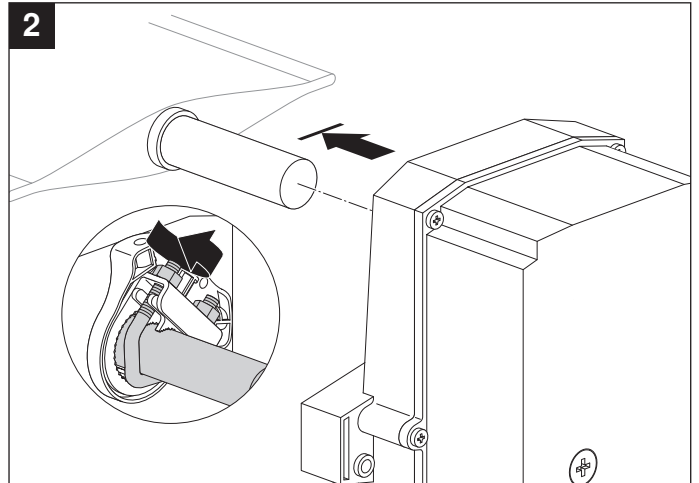
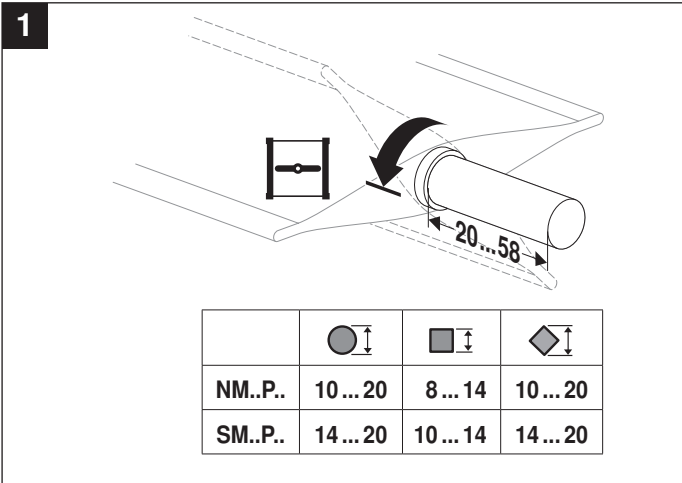





AC 24 V / DC 24 V



AC 100 ... 240 V ⚠



AC 24 V / DC 24 V

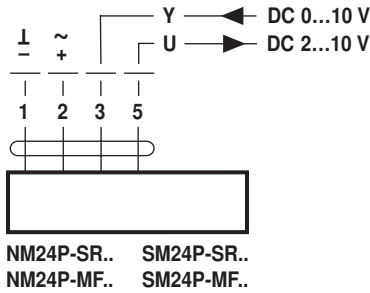

AC 100 ... 240 V ⚠

